

Why Choose Carlin on *Slant/Fin*®?

Better Performance. Better Diagnostics.



EZ Oil Burner Features

- Pro-X 70200 Primary Control
 - Xtreme Diagnostics pinpoint cause of burner faults for fast, accurate repairs
 - LCD displays burner status & faults in real-time
- OEM Specifications – Factory set to Slant Fin requirements for optimal performance
- EZ Design – Simplified setup and servicing
- Quiet Operation – Engineered for smooth light-off and combustion
- Oil pump with secondary internal cone valve – Provides added shutoff protection

Order your next Carlin EZ Oil Burner with our Pro-X 70200 Primary to bring the industry's most advanced control to your Slant Fin Intrepid Series Boiler.


Carlin®

Combustion Technology, Inc.


126 Bailey Road • North Haven, CT 06473 • 203-680-9401
www.carlincombustion.com

PROX™ 70200 Xtreme Diagnostics

Icons and messages clearly identify the cause of fault condition.
Detailed history of last 32 faults takes guesswork out of troubleshooting.

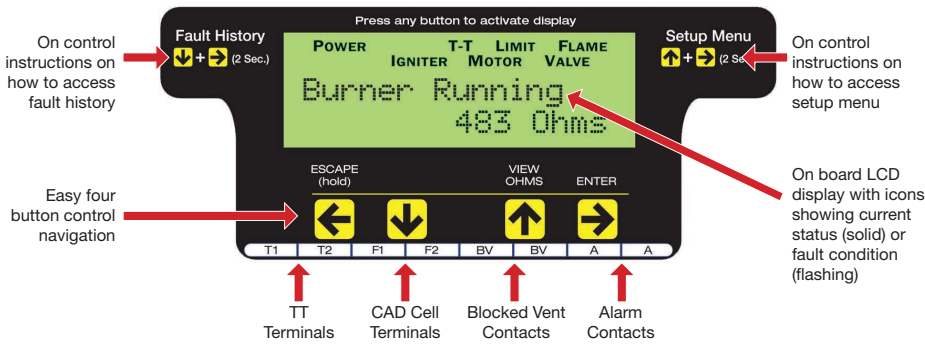

Last Fault Alert – Real diagnostics that spell out what the problem is when your technician arrives on the job even if control has been reset. Below is a snapshot of what you could see on a no heat call.

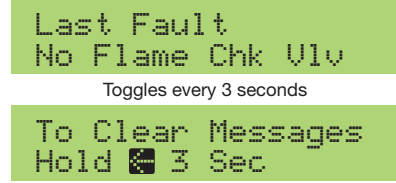

Compare the Carlin PROX™ 70200 to Beckett Genisys and Honeywell



FEATURES	CARLIN 70200	BECKETT GENISYS	HONEYWELL† 7284U
Built in LCD Display	Yes	No	Yes
Adjustable TFI	Yes	No	Yes
Adjustable Flame Stabilization	Yes	No	No
Adjustable Ignition Type (Interrupted or Intermittent)	Yes	Yes	Yes
Adjustable Pre & Post Purge	Yes	Yes*	Yes
Adjustable Allowed Recycles	Yes	No	Yes
Internal T-T Jumpered	Yes	No	Yes
Fault History	Yes	Yes*	Yes
Alarm Relay	Yes	No**	No
Blocked Vent Contacts	Yes	No	No
Motor, Ignitor, and Valve Sense Display	Yes	No	No
Pump Prime	Yes	Yes	Yes
Display Icons	Yes	No	No

Line Volts Display	Live Ohms Reading

70200 SPECIFICATIONS	
Power Input (red/white wire)	120 VAC, 60 HZ
Limit Circuit Input (black wire)	120 VAC, 60 HZ
Motor Load (orange wire)	10 FLA/ 60 LRA (reduce by valve load)
Ignitor Load (blue wire)	120 VAC, 60 HZ, 500 VA
Vent Input	120 VAC, 60 HZ
Valve Load	2 amps
Vent Load	0.1 amp
Line Heater	1 amp
Alarm Contacts (dry contacts)	24V, AC/DC, 2A
Blocked Vent Contacts (dry contacts)	24V, AC/DC, 2A
Operating Temperature Limits	+32°F to +140°F
Storage Temperature Limits	-40°F to +185°F
Thermostat Anticipator Current	0.1 A, AC
Agencies	UL Recognized (US & Canada)

Replaces Beckett

7505A-000, 7505P-1515, 7505B-1500

Replaces Carlin

40200, 42230, 48245, 50200, 60200

Replaces Honeywell

RA116, RA117, R7184A, R7184B, R7184P, R7184U, R7284, R8184G, R8184P, R8184M (with Carlin Kool Kit)

Replaces ICM

ICM1501, ICM1502, ICM1503

Carlin®
Combustion Technology, Inc.

126 Bailey Road • North Haven, CT 06473
203-680-9401 • Fax 203-680-9402
www.carlincombustion.com

*Only with tool carried by service technician.

**Not standard offering. Must purchase (52040 alarm model) added plug-in feature.

†Honeywell is a registered trademark of Honeywell International, Inc.